


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS



  
**Stanley P. Johnson**  
 REGISTERED CIVIL ENGINEER  
 May 20, 2011  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

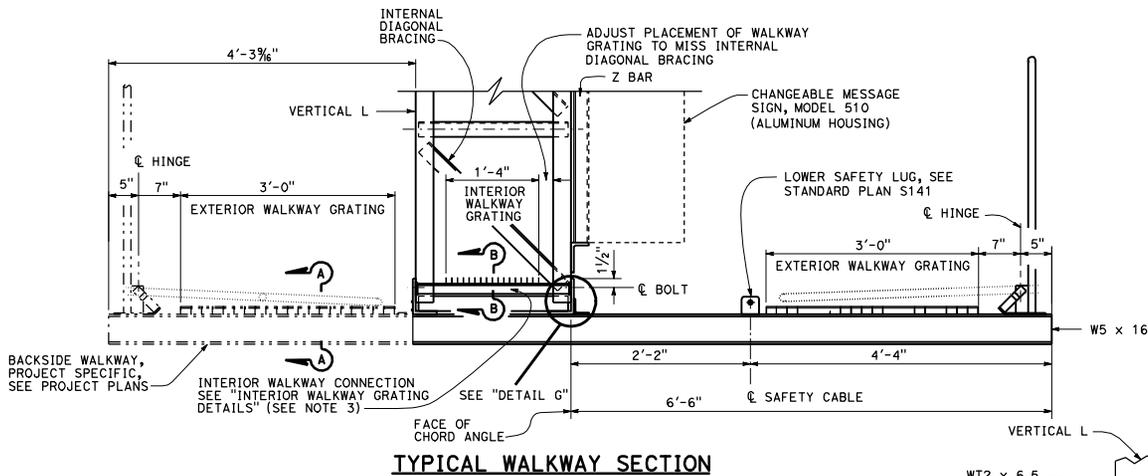


**TYPICAL WALKWAY SECTION**

**NOTES:**


1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 1/2" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Interior grating shall be installed only for projects requiring backside walkways.

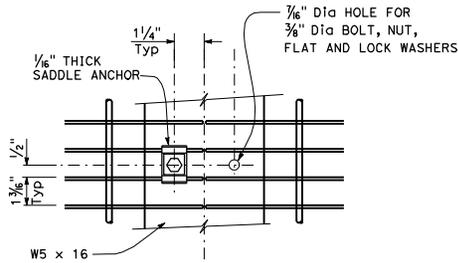

**PLAN**

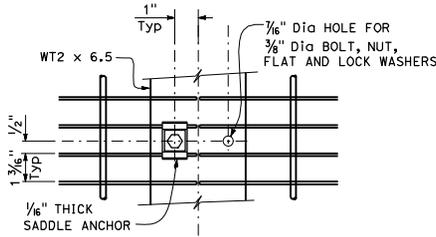


**PLAN**

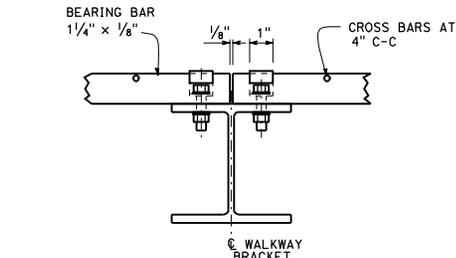

**SECTION A-A**

**EXTERIOR WALKWAY GRATING DETAILS**


Shown at splice

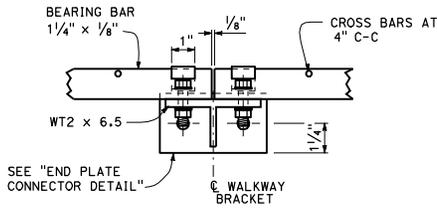


**SECTION B-B**

**INTERIOR WALKWAY GRATING DETAILS**


Shown at splice

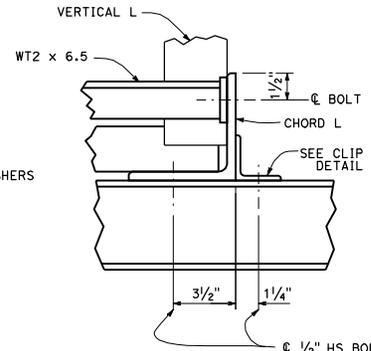

**DETAIL G**

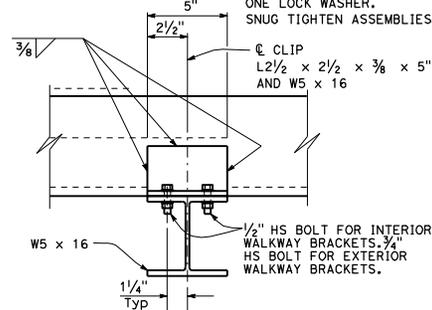

**CLIP L DETAIL**

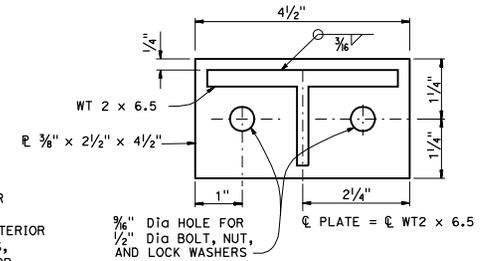

**END PLATE CONNECTOR DETAIL**

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**OVERHEAD SIGN-TRUSS  
 SINGLE POST TYPE  
 WALKWAY DETAILS  
 CHANGEABLE MESSAGE SIGNS  
 MODEL 510**  
 NO SCALE