









DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 20, 2011
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER
Tillot Satter
No. C42892
Exp. 3-31-12
CIVIL
STATE OF CALIFORNIA

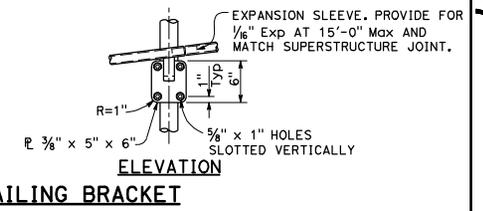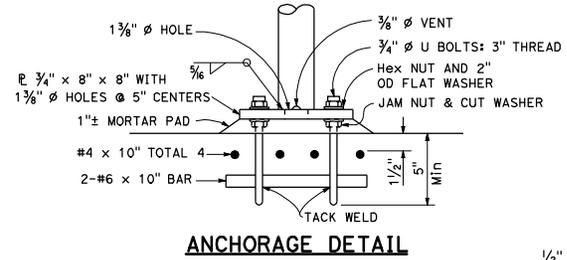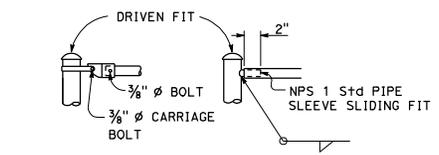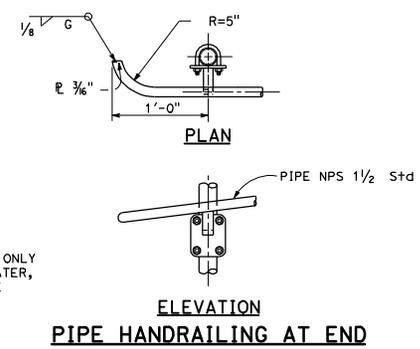

- NOTES:**
1. Peen all bolt threads.
 2. Railing shall conform to horizontal and vertical alignment. Posts shall be vertical. Top and bottom pipes shall be bent if radius is 148'-0" or less; may be on 8'-0" chords if radius is over 148'-0".
 3. When railing is on slope, 6'-0" chain link fabric shall be placed parallel to slope.
 4. Additional pipe NPS 1/4 Std required when radius is less than 150'-0".

May be used when thickness of concrete is 1'-0" or more.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
CHAIN LINK RAILING
NO SCALE