



TYPICAL ALUMINUM CLAMP MOUNTING

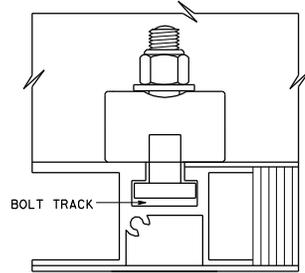

**SECTION B-B
TYPICAL BOLTED CONNECTION
TO STRUCTURE SUPPORT**

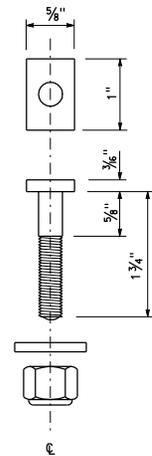

STAINLESS STEEL BOLT


D18+	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
May 20, 2011 PLANS APPROVAL DATE					
<small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>					

A-1 HARDWARE QUANTITY TABLE


SIGN LENGTH	SIGN DEPTH SEE NOTE 4	UNITS REQUIRED SEE NOTE 3
15'-0" OR LESS	4'-2" - 5'-0"	4
16'-0" - 24'-0"	4'-2" - 5'-0"	6
15'-0" OR LESS	5'-10" - 10'-0"	8
16'-0" - 24'-0"	5'-10" - 10'-0"	12

NOTES:


1. Refer to applicable Standard Plan for additional mounting details.
2. Rectangular head bolt, hexagon stop nut, and flat washer shall be 3/8" diameter (18-8) stainless steel.
3. One unit of A-1 hardware shall consist of two sets of these components: clamp, bolt, nut and washer.
4. Signs 9'-2" and 10'-0" in depth may be fabricated in three panel sections to avoid legend from being placed on a horizontal seam. Increase number of units of mounting hardware accordingly.

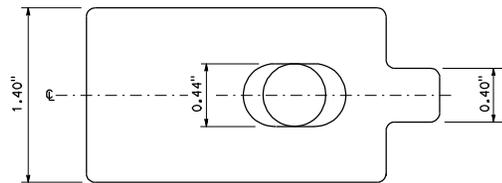

TOP VIEW

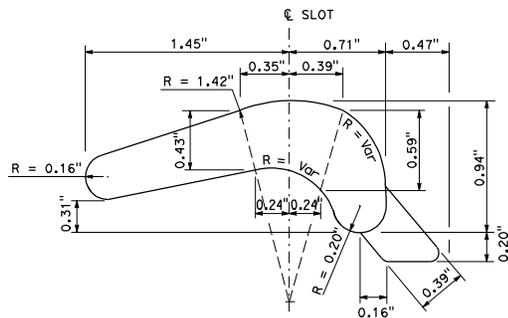

SIDE VIEW



FRONT VIEW

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**TYPE A-1 MOUNTING HARDWARE
FOR OVERHEAD LAMINATED
TYPE A PANEL
(TRUSS AND LIGHTWEIGHT
SIGN STRUCTURES)**

NO SCALE

S87